

<http://www.loolboxhd.com/>  
<https://www.facebook.com/loolbox/>  
[sales@loolboxHD.com](mailto:sales@loolboxHD.com)

**Golden boxes and Quadcore black boxes re-install system instruction**  
**This instructions work only with Win7,other not tested**  
**If your box are bought before June.2015,please don't use this instructions**

Before you do this steps please download the files that you need.

1)System main file img.file:

<http://195.154.194.225/4st.rar>

(need upzip it after download,then you can see a img file inside,this file 689M,need take a while to download)


2)USB burning tool.

[http://195.154.194.225/USB\\_Burning\\_Tool\\_v2.0.5.15-build7.rar](http://195.154.194.225/USB_Burning_Tool_v2.0.5.15-build7.rar)

(this tool to install to your computer as a system burning tool )

3)You need prepare a USB-USB cable .

(this cable is used to connect the box USB port to the computer USB port.the cable should be a qualified one(must be strong enough to holding the data connections,such as the one shows from the picture)



1、 unzip ( ) , press ( )

2、 after installing setup\_v2.0.1\_x86.exe autosave to C:\Program Files\Amlogic\USB\_Burning\_Tool.



3、 open from your computer desktop(if you can not find this shortcut you need to find out where you have installed it,the default path C:\Program Files\Amlogic\USB\_Burning\_Tool), Import image → find the img file that you have unzipped→choose the software img:

The screenshot shows the USB Burning Tool v2.0.5.15 application window. The 'File' menu is open, with 'Import image' highlighted by a red arrow. The main window contains a large yellow area for file selection, a 'Start' button, and a 'Refresh' button. On the right, there is a 'Configuration' section with checkboxes for 'Erase flash', 'Erase bootloader', 'Reset after success', and 'Overwrite key'. Below this is a 'Key' table with columns 'Key' and 'Available'. At the bottom, there is a 'Notice' section with instructions. The status bar at the bottom shows 'Ready' and a table with columns 'Total', 'Success', and 'Error'. Below the application window, a file list is shown with a red arrow pointing to 'bilin\_4st\_20151016\_aml\_upgrade\_package.img'.

Device ID	Time	Result

Total	Success	Error


File Name	Size	Type	Date	Hash
bilin_4st_m201-ota-20151016.zip	378,784,6...	WinRAR ZIP 压缩...	2015/10/16 ...	3F9777C5
bilin_4st_20151016_aml_upgrade_package.img	627,783,0...	光盘映像文件	2015/10/16 ...	3E8D5099

4.After loading file finished you need to connect USB cable to the computer USB port (if you are using desktop computer to do this you must connect the cable from the computer backside USB port as it can providing you full 5V voltage to avoiding failure)

5. There is small circle hole between the 2 USB ports backside from the box. Find it and use a small metal stick to press the inside button,after u did it well you should be able to hear “tick” from the box inside.then keep holding it don’t loose your strength.


(In this step the box power cable should be cutoff)

6. From you the burning tool panel you need to tick those two options, Erase flash,and Erase bootloader.then press **start**

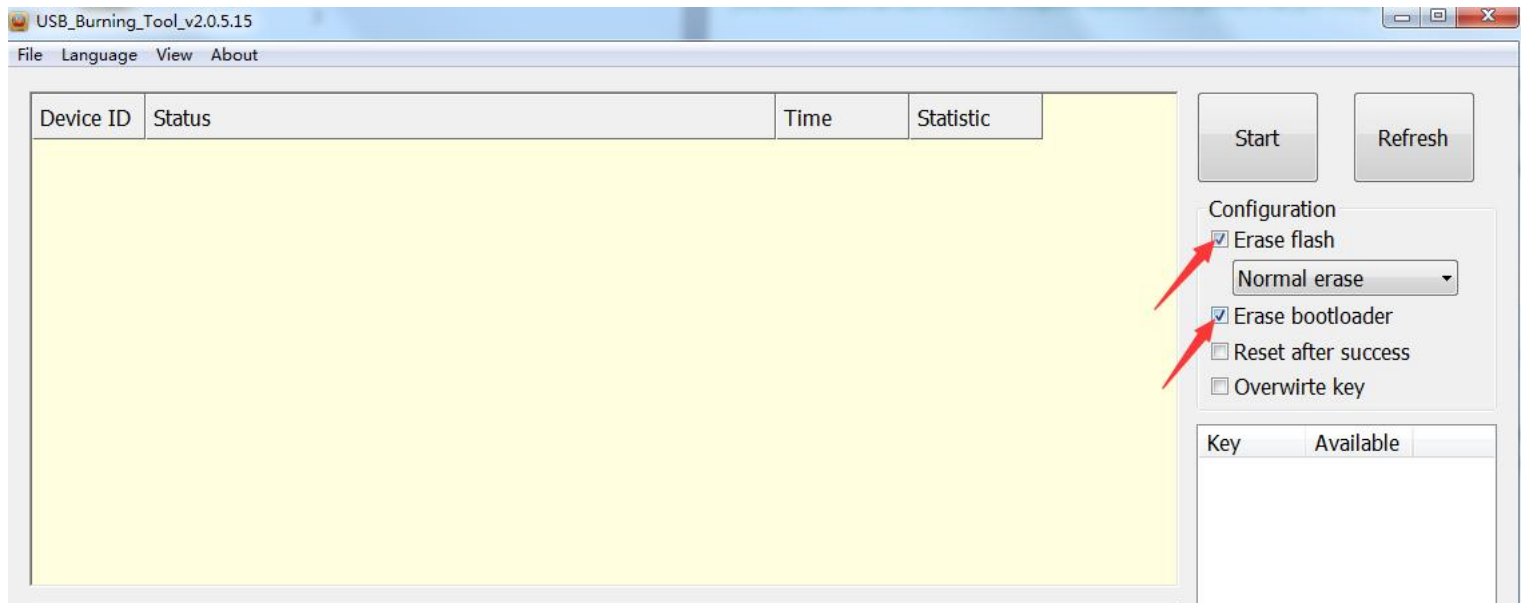

7. Then you must connect the USB cable (one side in computer one side now must connect the box) to the box **USB port close the LAN port(if you connected with the other USB port will not working)**

IF you did everything right you can then see the installing process start to working

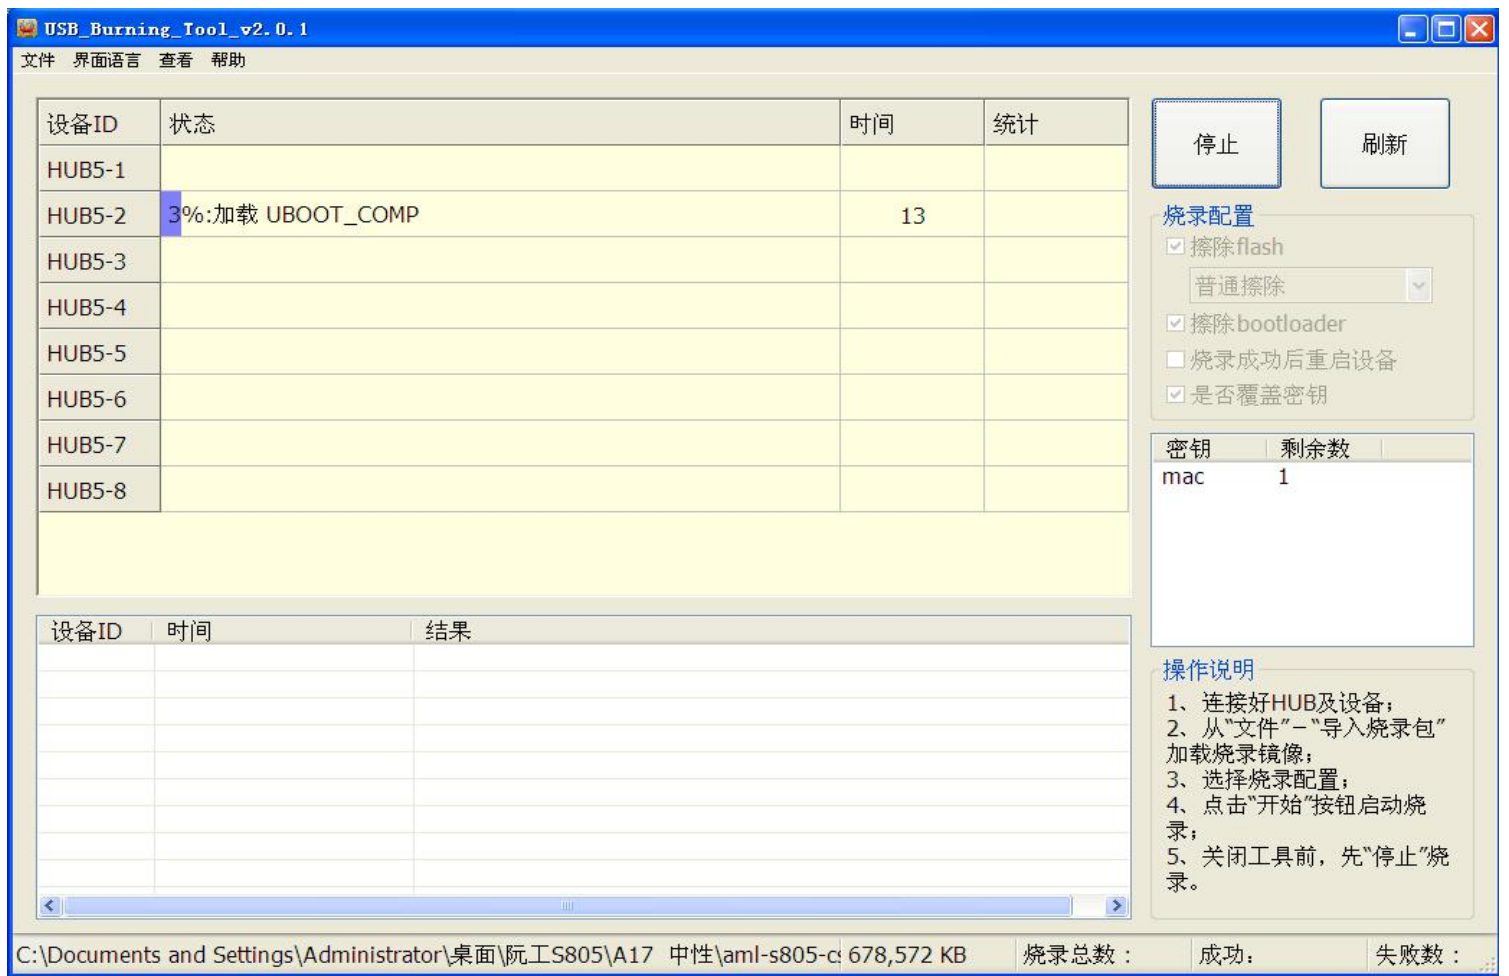

8、 After about 5-6mins the process will finish and hit 100%. Then you press stop.and plug the box out,and connect box with power to turn it on see if the box working normal. The first boot will take about 5mins.

USB\_Burning\_Tool\_v2.0.1

文件 界面语言 查看 帮助

设备ID	状态	时间	统计
HUB5-1			
HUB5-2	100%:烧录成功	5:31	0/1
HUB5-3			
HUB5-4			
HUB5-5			
HUB5-6			
HUB5-7			
HUB5-8			

**停止**      **刷新**

**烧录配置**

擦除flash  
普通擦除

擦除bootloader

烧录成功后重启设备

是否覆盖密钥

密钥	剩余数
mac	0

**操作说明**

- 1、连接好HUB及设备；
- 2、从“文件”-“导入烧录包”加载烧录镜像；
- 3、选择烧录配置；
- 4、点击“开始”按钮启动烧录；
- 5、关闭工具前，先“停止”烧录。

设备ID	时间	结果
HUB5-2	2014-10-16 17:15:05	[0x00000000]烧录成功

C:\Documents and Settings\Administrator\桌面\阮工S805\A17 中性\aml-s805-c 678,572 KB      烧录总数 :1      成功: 1      失败数 :0

